




SINCE  
**1950**


# TRADITIONAL QUALITY NONWOVENS

## DOALEN / VUTEX

Nonwoven needle punched textile

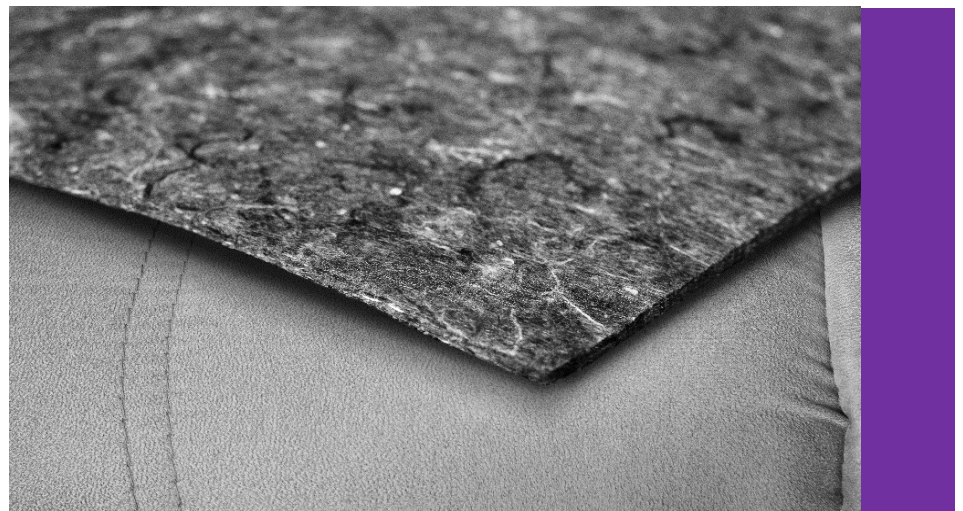

- Characteristic:** Nonwoven textile mechanically bonded by needle punching and coated
- Material content:** 100 % Recycled fibres  
PVAC Binder
- Colour:** Various
- Weight:** DOALEN: 300 to 800 g/m<sup>2</sup>  
VUTEX: 400 to 600 g/m<sup>2</sup>
- Standard width:** 2 m
- Certification:** Management system according to standards ISO 9001, ISO 14001, ISO 45001 and ISO 50001
- Funktion:**



REINFORCEMENT

**Use:**



FURNITURE  
INDUSTRY



SHOE  
INDUSTRY



PLASTICS  
INDUSTRY

Material specification sheet

Date: 01. 09. 2019

No: T-009-01



# TRADITIONAL QUALITY NONWOVENS

Material specification sheet

Date: 01. 09. 2019

No: T-009-01

## DOALEN / VUTEX

Nonwoven needle punched textile

DOALEN	300	350	380	400	450	480	500	600	700	800	
<b>PHYSICAL PROPERTIES</b>											
Weight [±15 %] / EN 29073-1	g/m <sup>2</sup>	300	350	380	400	450	480	500	600	700	800
Thickness [±15 %] / ČSN EN ISO 9863-1	mm	3,1	3,4	3,5	3,7	3,9	4	4	4,5	5	5,4
Reinforcement	R	X	X	X	X	X	X	X	X	X	X
<b>CHARACTERISTICS</b>											
Description	Nonwoven textile mechanically bonded by needle punching and reinforced by PVAC binder										
Material content	100% Recycled fibres										
	PVAC binder										
Colour	Various										
<b>DIMENSION, PACKAGING AND STORAGE</b>											
Maximum roll width [±2 cm]	m	2	2	2	2	2	2	2	2	2	2
Roll length	m	50	50	50	50	50	50	50	50	50	50
Format dimensions [±1 cm]	According to costumers needs										
Packaging	Rolls are packed in PE foil.										
Storage	In covered, clean and dry spaces										

VUTEX	400	430	500	600	
<b>PHYSICAL PROPERTIES</b>					
Weight [±15 %] / ČSN EN 12 127	g/m <sup>2</sup>	400	430	500	600
Thickness [±15 %] / ČSN EN ISO 9863-1 (2kPa)	mm	4,0	4,2	4,3	4,6
<b>FUNCTION</b>					
Reinforcement	R	X	X	X	X
<b>CHARACTERISTICS</b>					
Description	Nonwoven textile mechanically bonded by needle punching and reinforced by PVAC binder				
Material content	100% Recycled fibres				
	PVAC binder				
Colour	Various				
<b>DIMENSION, PACKAGING AND STORAGE</b>					
Maximum roll width [±2 cm]	m	2	2	2	2
Roll length	m	50	50	50	50
Packaging	Rolls are packed in PE foil.				
Storage	In covered, clean and dry spaces				

The above technical parameters are average values and serve for general information. The manufacturer reserves the right to change it.